

BAGEL MINI


Handle Mounting Instructions

A.S.HELSINGÖ

Content



1 x MOUNTING SCREW M4



1 x BAGEL MINI

Mounting


It's a matter of taste. You can mount the handle where you think it looks best.

We like to place them like this:

40 mm from the top of the door and
40 mm from the side of the door.

1. Mask the area where you want to install the handles using tape, both the front and backside of the door.
2. Mark the position of the drill holes using a drilling template.
3. Drill the holes for the screws from the front side of the door using a 5 mm drill. Do not to apply too much pressure to the drill. This can cause damage to the door when the drill breaks through the surface.
4. Remove the tape and install the handle carefully with the screw.

Drilling template

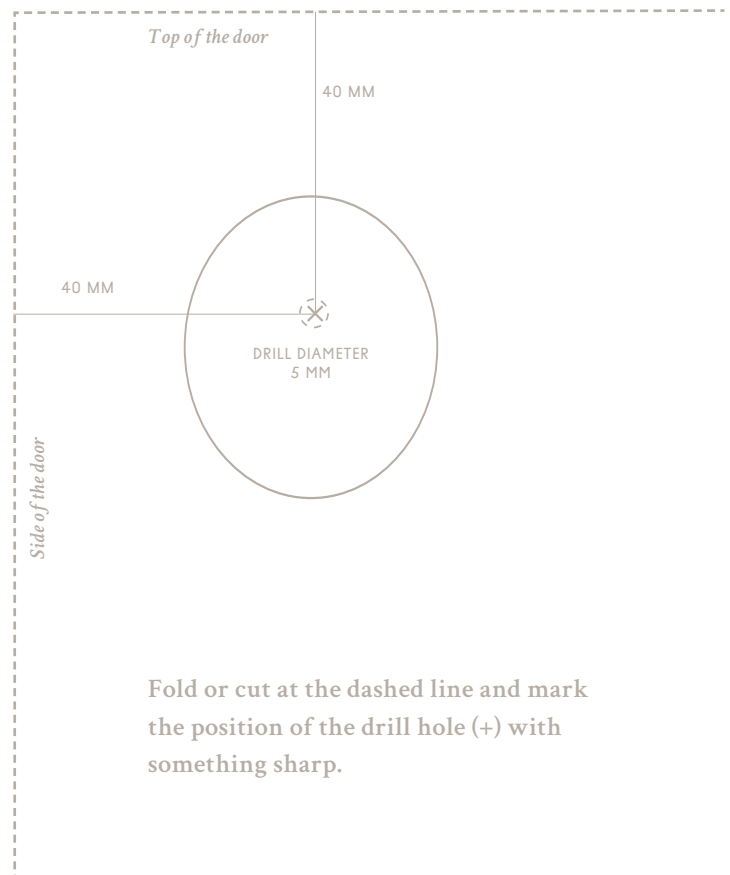

Fold or cut at the dashed line and mark the position of the drill hole (+) with something sharp.

Care & cleaning

We want our materials to age naturally and beautifully. For this reason, we have left all our metal handles untreated, and they develop a patina over time. You can clean brass and copper handles with a suitable metal polish.

We are happy to help you

info@helsingo.com
+358 20 718 1510

Show how beautiful it looks

Share the A.S.Helsingö additions in your home using
@a.s.helsingo and #ashelsingo.